

Sunsail 39i 3 Cabins 2 Heads Yacht Specification

Sunsail 39i

HULL & DECK

Prisma Process® injected deck, ISO gelcoat surface, discontinuous balsa block coring

Hull is solid, hand-laid fibreglass, white ISO gelcoat surface, protective barrier coat

3rd generation inner fibreglass grid, high-load zones cut out and relaminated, drainage system through structure, special emergency repair zone in keel

Open stainless steel bow pulpit with navigation lights and integrated wiring for lights

Stern pulpits are stainless steel with flag holder, buoy bracket and integrated wiring passage for GPS antenna

Outboard engine support

Double level of stainless steel lifelines without PVC coating

Stainless steel stanchions

Toerail with integrated stainless steel chocks and drainage for side deck

4 x aluminium mooring cleats forward and aft

Sculpted, long handrails on coachroof for secure movement forward

Cleats at midship

- 4 x Fixed hull ports with trackmounted curtains
- 2 x Opening cockpit and roof ports with curtains
- 4 x Lateral fixed windows with curtains
- 2 x Opening ports integrated into lateral windows
- 4 x Opening deck hatches forward-facing with sun blinds integrated into headliner

Combination shade/insect screens for deck hatches

Sunsail striping and graphics

ENGINE & STEERING SYSTEM

Yanmar 3JH4E 40 HP, 29.4Kw latest generation of environmentally friendly engines

Fully soundproofed engine compartment with engine access behind stairwell and from aft cabin

Stainless steel propeller shaft

130L rotomolded fuel tank located under aft berth with deck fill

Fuel/water separator

Built-in muffler, forced air ventilation and stainless steel exhaust fitting aft

Fixed 3-blade propeller

Fibreglass rudder with solid stainless steel shaft

Patented self-aligning rudder bearings for lower friction

2 steering wheels with compasses at each steering position and stainless steel grabrails

Throttle and engine control panel mounted at starboard helm, engine panel includes fuel gauge, RPM gauge, warning lights, ignition

Racor primary fuel filter with water separator

Anode on shaft fitted inside boat

Rope cutter on prop shaft

MOORING & ANCHORING

Primary anchor and all chain rode

Secondary anchor with chain and rope

Electric windlass Quick 1000W combination rope and chain, vertical-mounted in the anchor locker, handheld remote,

Manual handle with swivelling self-launching roller for hands-free launching and retrieving for tackle

Anchor roller double stainless steel fitting

Anchor locker forward, lockable, room for anchor and tackle, integrated windlass area, holder for windlass handle

COCKPIT

Teak inlay on seating area, transom and transom steps

2 lockers under bench seats and 1 lazerette locker under the port helm seat for technical access to steering system

Liferaft locker located in dedicated compartment between helm seats

Fixed GRP cockpit table with storage, cup holders, stainless steel handrail, courtesy lighting, 12v plug

Gas locker located in lazerette locker under starboard helm seat, room for 2 gas bottles with connection to gas system and cut-off valve under stove in the galley

Emergency tiller delivered with the boat, chrome fitting in cockpit floor

Instrumentation within easy reach of helm positions,. GPS chartplotter mounted at aft end of cockpit table with easy viewing from each helm

Folding stainless steel swim ladder mounted on transom

Retractable hot and cold water shower with tap

MAST & RIGGING

Classic aluminium mast with double spreaders, spinnaker track mounted forward

Discontinuous standing rigging 1x19 stainless steel wire

Fixed, double backstay

Genoa furler with attachment to stemhead fitting and furling line lead aft to roof winch

Polyester topping lift, mainsail halyard, genoa halyard, mainsheet, genoa sheets

Rigid boom vang with gas cylinder and control line lead aft to the cockpit

Single line mainsail reefing

Low stretch topping lift

Rope stopper for genoa halyard

SAILS

Heavy duty charter spec fully battened mainsail

Heavy duty charter spec furling genoa with UV protection strips

Heavy duty chart spec lazyjacks and stackpack system

2 self-tailing genoa winches

2 self-tailing coachroof winches

Genoa tracks adjustable lead cars with line led aft to cockpit jammer.

2 x winch handles with ballbearing grip

Spinlock line jammers, on both sides of coachroof with Harken return blocks

ELECTRICAL SYSTEM

60amp 12v alternator

Separate engine start and domestic AGM (Absorbed Glass Matt) batteries system

Batteries charged via low loss charge splitter system

Positive battery switch for engine and domestic bank and general cut-off switch mounted on panel in aft cabin

Electrical panel with 12v breakers, 230v breakers, 12v ammeter, 12v consumption meter, 12v charging

12v plug per cabin and at nav station

Flush mounted chromed brass ceiling lights in saloon, head compartments and cabins

Chrome reading lights in aft cabins

Indirect halogen lighting under side decks in saloon and head compartments

Shore power with cord wired direct

Yacht Specification

Electronic depth and speed reading SOG from the GPS

Electronic wind speed and direction

Chart plotter with GPS

VHF at chart table with masthead antenna

Remote speaker for VHF in cockpit

Stereo/CD with socket for MP3 with inside speakers

Cockpit speakers for stereo

Fans in each cabin plus saloon and galley

WATER SYSTEM

2 rotomolded water tanks located under forward and aft berths with separate deck fills (total capacity 355L)

Hot and cold pressurised water distributed through-out the boat via semi-rigid hose

Heavy-duty water pump and accumulator tank for consistent water pressure

40L hot water tank that is connected to engine heat exchanger and to 230v electrical system

Chromed shower faucets in washrooms

Electric bilge pump on float switch and manual dual-action pump in the cockpit

Digital water level display

Shower sumps equipped with individual electric pumps with filters and on-off switches

Large manual pump marine toilets

Seawater filter

SALOON

Saloon with U-shaped seating area to starboard, wrap-around cushions and storage under seating area

Saloon dining table

Saloon table converts to a double berth

Bar locker and bottle storage

Upper storage cabinets

Lounge seating to port with plush cushions and upper storage cabinets

2 x Saloon stereo speakers

Plexiglass companionway door with dedicated storage location in the aft starboard cabin

Headroom: 1.95m / 6ft 5in

Laminate wood panels and floorboards throughout the interior

GALLEY

Headroom: 1.93m / 6ft 4in.

Galley with double stainless steel sinks with cover and reversible cutting board, laminated countertops, chrome plumbing fittings, storage cabinets and drawers

L-galley to port with glass separator between galley counter and seating area

Gimballed 2-burner stove with oven and grill with stainless steel protection bar

180L fridge compartment with vertical access

Single fridge box with freezer area, wire baskets, interior lighting comes on when door opened, 12v refrigeration and integrated compressor

Fridge drain overboard with pump and filter

Propane solenoid with switch and large warning light

NAVIGATION STATION

Full-function with general electrical panel

Sliding nav desk that can be placed in forward-facing or aft-facing position for increased seating with curved nav seat and storage underneath

Deep navigation desk with storage

Gooseneck chart light mounted at nav station

Fixed port above chart panel to prevent water damage to electrics panel

12v cigarette lighter socket at chart table

HEADS

Head compartment with sink and shower

Clothes hook, mirror, towel holder, toilet paper holder, wastebasket

Cabinet above sink and shower sump with grate

Electric drainage pump,

50L/13gal holding tanks per toilet

COMPANIONWAY

Headroom: 1.98m / 6ft 8in.

Companionway with laminated side panels, treads with non-slip surface.

2 solid wood handrails.

Formica on companionway side for UV protection

Non-slip on companionway steps

FORECABIN

Headroom over berth: 1.88m / 6ft 2in.

Double berth with wood trim, high-density foam mattress: 2.05m x 1.85m (6ft 9in x 6ft 1in).

Storage forward of berth

Deep cabinet with shelves and hanging rod

Wood hull liner with storage shelf, vinyl liner above shelf

AFT CABINS

Headroom: 1.95m / 6ft 5in.

Double berth with high-density foam mattress: 2.00m x 1.48 (6ft 7in x 5ft 9in).

Deep cabinet with shelves and hanging rod

Wood hull liner with storage shelf, vinyl liner above shelf


ADDITIONAL CRUISING GEAR

Above-deck equipment.

Bedding, linens and galley equipment.

Safety equipment.

Illustrations, equipment and specifications are subject to change without prior notice, as the company and builder reserve the right to modify or improve this model.

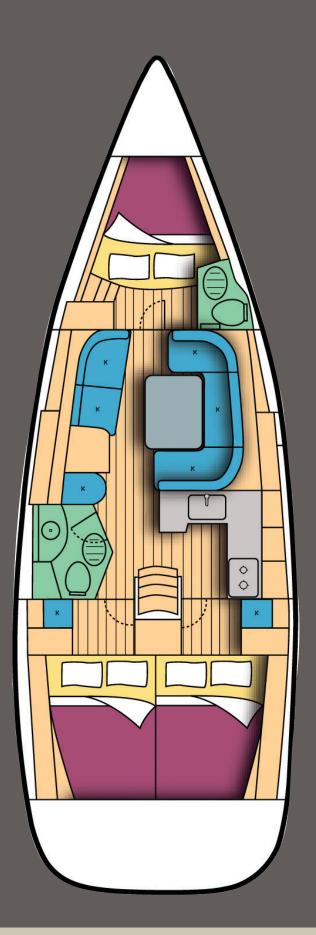

Sunsail 39i

The new Sunsail 39i features twin steering positions with winches placed near the helms providing for easy sail handling. This yacht is all new from the keel up, with modern conception using innovative designs and construction technology. Built by Jeanneau, she features 3 cabins and 2 heads plus spacious accommodations. The Sunsail 39i delivers quality unmatched in her class and truly represents the next generation of yachts.

Principal Specifications

Length Overall	38 ft 11 in/11.86 m
Waterline Length	35 ft 2 in/10.71 m
Beam	12ft 9 in/3.88 m
Draft	6 ft 7 in/2 m
Sail Area	759 sq ft/70.5 sq m
Auxiliary Power	39 HP
Fuel Capacity	34 gal/130 L
Water Capacity	94 gal/355 L
Berths	6 + 2 in saloon
Displacement	16,126 lbs/7,330 kg
Heads	2
Showers	3